

CATHODIC Protection



DE NORA ELETTRODI NETWORK
GRUPPO DE NORA

ELTECH Gruppo De Nora
100 Seventh Avenue
Chardon, OH 44024 USA
ph: [440] 285-0300

www.lidaproducts.com

Protech Business Unit

LIDA® Rod Anodes



LIDA® Rod Anodes

LIDA® Rod Anodes are comprised of a titanium substrate with a mixed metal oxide coating. The mixed metal oxide is a crystalline, electrically-conductive coating that activates the titanium and enables it to function as an anode.

Anode Life — Due to the extremely low consumption rates and dimensional stability of mixed metal oxide anodes, the electrical resistance of LIDA® Rod Anodes remain essentially constant with time.

The high current density capacity of De Nora mixed metal oxide anodes has the added advantage of allowing high current overloads for initial polarization without causing harm to the anode.

Anode life projections are accurately made using the lifetime graphs (See Figures 1-7 on back).

ELTECH LIDA® Rod Anodes are available in the following standard sizes:

- 1/8" x 4'
- 1/4" x 4'
- 1/2" x 4'
- 3/4" x 4'

Selection of the anode coating is based on operating environment:

- FW** Freshwater or Brackish Water
- SWT** Seawater

APPLICATIONS

- Process Vessels
- Water Condensor Boxes
- Heat Exchangers
- Water Intake Structures

FEATURES

- High Current Output
- Low Coating Wear Rate
- Five Year Product Warranty
- Also available as Rod Anode Assemblies

BENEFITS

- Lower Cost Per Ampere Year
- Constant Electrical Resistance
- No Hassles

Standard Rod Assemblies

Part Number	Freshwater or Brackish Water		Sea Water Environments	
	FA-ROD 0.5FW	FA-ROD 0.75FW	FA-ROD 0.5SW	FA-ROD 0.75SW
Max. current output	1.6amps	2.4 amps	9.7 amps	14.6 amps
Rod Diameter	0.5 inch (1.27 cm)	0.75 inch (1.91 cm)	0.5 inch (1.27 cm)	0.75 inch (1.91cm)
Total Length	24 inch (61 cm)	24 inch (61 cm)	24 inch (61 cm)	24 inch (61 cm)
Active Length max-User specified	16 inch (41 cm)	16 inch (41 cm)	16 inch (41 cm)	16 inch (41 cm)
FRP Length	6 inch (15 cm)	6 inch (15 cm)	6 inch (15 cm)	6 inch (15 cm)
Maximum water velocity	2ft/sec (.6 M/sec)	5ft/sec (1.5 M/sec)	2ft/sec (.6 M/sec)	5ft/sec (1.5 M/sec)



DE NORA ELETTRODI NETWORK
GRUPPO DE NORA

CATHODIC Protection

LIDA® Rod Anodes

Maximum Current for LIDA® Rod Anodes (life in years)

- 1/8 Rod, STD
- 1/8 Rod, XL
- 1/4 Rod, STD
- 1/4 Rod, XL
- 1/2 Rod, XL
- 3/4 Rod, XL

**STD = standard
XL = extended life**

Figure 1

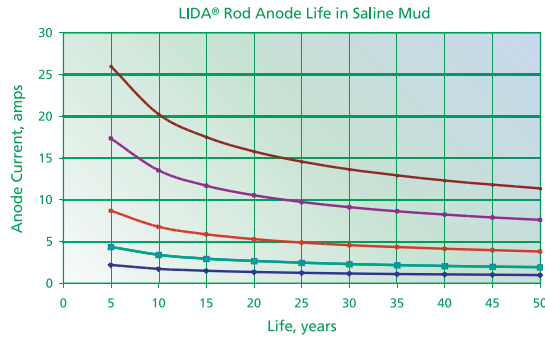


Figure 2

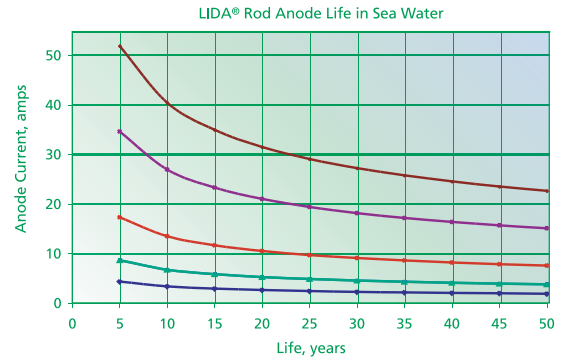


Figure 3

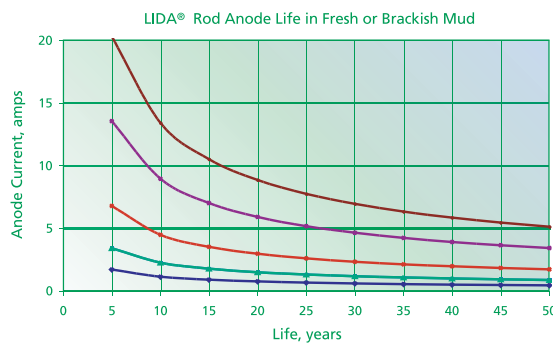


Figure 4

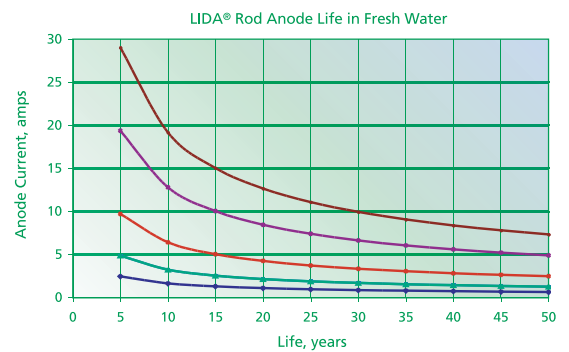


Figure 5

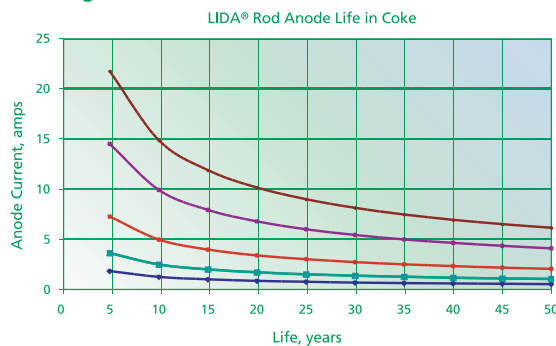


Figure 6


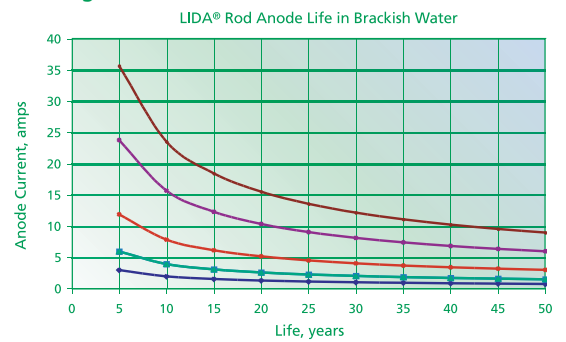


Figure 7

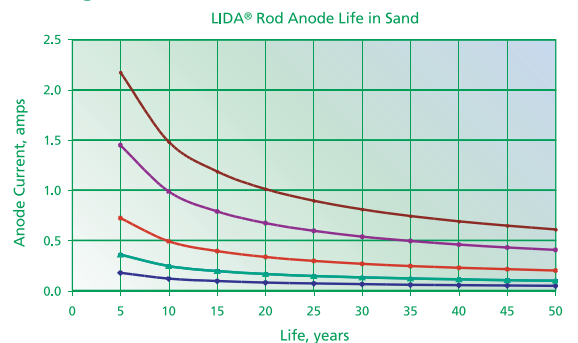

ELTECH Gruppo De Nora, 100 Seventh Avenue, Chardon, OH 44024 ph: [440] 285-0300 www.lidaproducts.com

LIDA® is a U.S. registered trademark of ELTECH Systems Corporation. LIDA® is a registered trademark worldwide of Oronzio de Nora SA licensed exclusively to the De Nora Elettrodi Network. All information, recommendations and suggestions appearing herein concerning the use of our products are based upon tests and data believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by De Nora Elettrodi Network Companies as to the effects of such use or the results to be obtained, nor does De Nora Elettrodi Network Companies assume any liability arising out of the use by others of the products referred to herein. In addition, the information herein is not to be construed as absolutely complete since additional information may be necessary or desirable when particular circumstances exist or because of applicable laws or government regulations. Nothing herein contained is to be construed as a recommendation to infringe any patent.